


TECHNICAL DATA SHEET

DESCRIPTION

A48 Gang Loop Ties are manufactured from high strength steel.

APPLICATION

A48 Gang Loop Ties are designed for securing and spacing modular type forms.

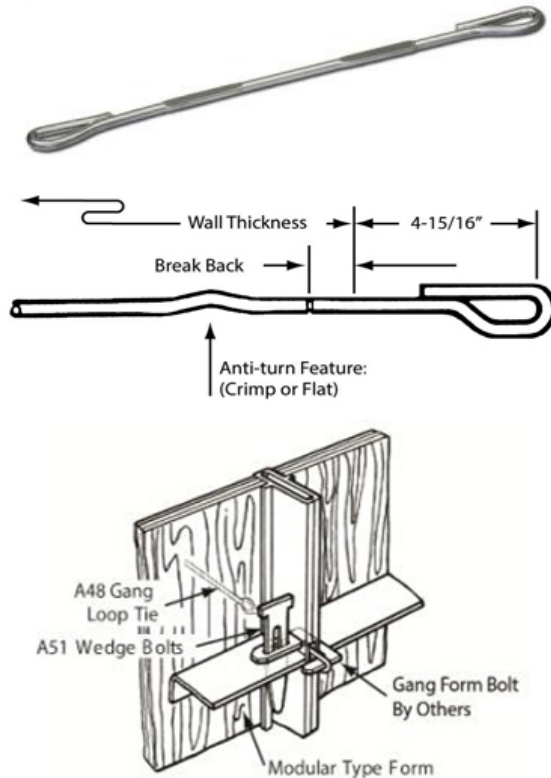

FEATURES

- Standard units are fabricated with 4-15/16" ends and 1" breakback.
- The longer length allows the tie to be used with gang form bolts and to be broken back before the form has been stripped.
- Other breakbacks, plastic cones and/or water resistant washers are available on special order.
- Safe Working Load is 2,250 lbs. for standard or 3,000 lbs. for heavy ties which provides a factor of safety of approximately 2 to 1.

RELATED PRODUCTS

- A2 Plastic Cones
- A51 Wedge Bolts

ORDERING INFORMATION

GANG LOOP TIES - HEAVY DUTY (4-15/16" ENDS)

Product Code	Description	Weight
F51806	6" WALL SIZE	0.27 LB
F51808	8" WALL SIZE	0.29 LB
F51809	9" WALL SIZE	0.30 LB
F51810	10" WALL SIZE	0.32 LB
F51812	12 " WALL SIZE	0.33 LB
F51813	13 " WALL SIZE	0.35 LB
F51814	14 " WALL SIZE	0.36 LB
F51815	15" WALL SIZE	0.37 LB
F51816	16 " WALL SIZE	0.41 LB
F51818	18 " WALL SIZE	0.45 LB
F51820	20 " WALL SIZE	0.48 LB
F51822	22 " WALL SIZE	0.49 LB
F51824	24" WALL SIZE	0.49 LB
F51826	26" WALL SIZE	0.51 LB
F51830	30" WALL SIZE	0.58 LB
F51836	36" WALL SIZE	0.70 LB

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.