

TECHNICAL DATA SHEET

**DESCRIPTION**


Dayton Superior Combination Dobie, Series: CWD is used for supporting wire mesh or rebar to ensure proper placement during construction. It has a standard strength of 4,000 PSI or a heavy duty strength of 5,000 PSI. The CWD comes in multiple heights within a single unit. CRSI Class 1, D.O.T Approved.

**APPLICATION**

Supports rebar mats and wire mesh to provide proper concrete cover of rebar that is used primarily in horizontal rebar applications.

**PRODUCT SPECIFICATION**

- Manufactured using standard 4000 psi
- High strength (5000 psi and up) Dobies available on request.

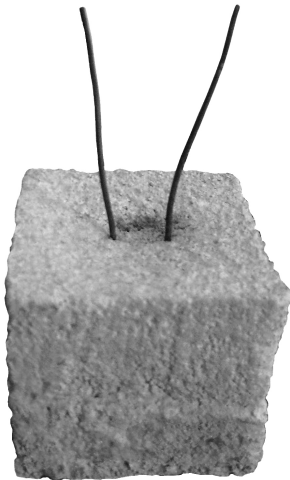

**FEATURES**

- Available in cover heights from 3/4" to 5"
- Suited for On-Grade, Below-Grade, Metal Decks, Side-Form Spacers, and Pools
- Custom sizes and configurations available on request

**APPROVALS / COMPLIANCE**

- Meets all requirements and qualifies as a CRSI Class 1 Bar Support.
- On-Grade or Below Grade, D.O.T. Approved (in most states).

**RELATED PRODUCTS**

- CCD Combination Dobies
- CDD Dowel Dobies
- CPD Plain Dobies

**ORDERING INFORMATION**

**WIRE DOBIES - STANDARD**

Product Code	Description	Weight
123700	2" X 2" X 3/4"	0.30 LB
123701	2" X 2" X 1"	0.33 LB
123702	2" X 2" X 1-1/2"	0.54 LB
123704	2" X 2" X 2"	0.73 LB
123706	2" X 3" X 3"	1.56 LB
123705	2-1/2" X 2-1/2" X 2-1/2"	1.40 LB
123707	3" X 3" X 3"	2.19 LB
123708	3" X 3" X 4"	2.67 LB
220108	3" X 4" X 5"	3.88 LB

**WIRE DOBIES - HEAVY DUTY**

Product Code	Description	Weight
220096	2" X 2" X 1-1/2"	0.50 LB
220099	2" X 2" X 2"	0.71 LB
220105	3" X 3" X 3"	2.20 LB

**MANUFACTURER**

Dayton Superior Corporation  
1125 Byers Road  
Miamisburg, OH 45342  
Customer Service: 888-977-9600  
Technical Services: 877-266-7732  
Website: [www.daytonsuperior.com](http://www.daytonsuperior.com)

**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.