



## POOL DECK

### POOL DECK

#### ACCESSORIES

##### D42 Tie Bags

Tie bags are 16 gauge, annealed loop-ended wire ties used for tying rebar and also other non-construction applications.

##### G27 Round Stake

Manufactured from high-quality steel with a sharp point to minimize rock deflection.

##### CR200 Wedge Anchor

A zinc-coated post-installed anchor for use wherever fixtures need safely secured into concrete.

#### CHEMICALS

##### Adhesive

##### Casica Construction Adhesive

One-component, polyether hybrid construction adhesive for creating strong bonds between common building substrates. 100% solids formulation offers VOC compliance and an eco-friendly adhesive option.

##### Sealers

##### Aggregloss™ J25

A clear sealer that will not yellow under exposure to sunlight. J25 is a formulation of 25% methacrylate copolymers in an aromatic solvent that forms a tenacious bond to the concrete surface and provides a long lasting high gloss film.

##### Ultra Seal EF

An Earth Friendly, non-yellowing, low-odor concrete sealer with exceptional chemical resistance.

##### General Use Repair

##### Recrete™ 20 Minute

General purpose cement based concrete repair and patching material. Provides a fast setting repair mortar with excellent workability. Used for repair and patching of vertical, overhead and horizontal areas.

##### Casica Concrete Repair

A concrete crack filler and sealer for repairs to vertical and horizontal concrete, masonry, stone and stucco. Interior and exterior use.

##### Cure & Seal

##### Cure & Seal 25% J22UV

An acrylic copolymer cure, seal and dustproofing compound in an aromatic solvent containing 25% solids with special UV

stabilizers. It is designed to form an excellent surface coating with a high gloss finish and provide outstanding cure performance. It is ultraviolet stable and resists yellowing while also meeting ASTM C309 and C1315.

##### Joint Fillers/Sealants

##### Casica Alpha 1

One-component, non-sag polyether hybrid sealant designed for maximum adhesion between a variety of surfaces. A paintable, weather resistant seal with 25% joint movement capability for the ultimate long-term, durable seal or bond.

##### ProFill™ SL

This superior-grade, one-component MS hybrid self-leveling sealant creates waterproof joints in horizontal concrete substrates. Ideal for filling cracks or gaps on driveways, sidewalks, patios, steps, and garage floors.

##### ProFill™ AW

Two-component polyurea joint filler designed for heavy duty traffic. Solvent free, flexible, and self-leveling, used to fill tooled interior/exterior control joints or new construction saw joints.



RESIDENTIAL  
**CONCRETE**  
SOLUTIONS

ACCESSORIES | CHEMICALS | FORMING SYSTEMS

OUTSIDE THE HOME

DRIVEWAY

PATIO | PORCH

SIDEWALK

POOL DECK

Backed by Dayton Superior's long history of excellence in the construction industry, residential brand Casica brings the same trusted selection, quality and performance to the residential market.

Casica offers a versatile and vast portfolio of accessory, chemical and forming products for new construction, repair, restoration and renovation in and around the home.

Casica is your **SINGLE-SOURCE** provider for comprehensive solutions to make your next build or home-based project a success.



contact@casica.com  
sales@casica.com

Customer Service: 888.977.9600  
Technical Assistance: 877.266.7732

Casica.com

Corporate Address:  
1125 Byers Road, Miamisburg, OH 45342



# TOP-CAST®

PROTECT. ENHANCE. SEAL.

## DECORATIVE CONCRETE FINISH SYSTEM

**TOP-CAST IS AN EASY-TO-USE, COST-EFFECTIVE CONCRETE FINISHING SYSTEM THAT OFFERS:**

- Uniform High-Quality Finish
- Unmatched Reliability & Control *and is*
- Environmentally Friendly 

### Top-Cast Finish System Products

#### SS 100 Site Saver

Protects surrounding surfaces from overspray and replaces costly plastic barriers. Easy removal within 24 hours.

#### Decorative Surface Retarder

Available in 12 different grades that create a range of finishes from micro-etch to fully exposed aggregate.

#### EX 200 Wash-Off Extender

Extends Top-Cast removal times and contributes to a more consistent etch.

#### PR 300 Penetrating Protector

Penetrates, protects and hardens extending the life of the substrate.

#### CS 400 Cure and Seal

Cures, seals and dustproofs exposed aggregate with a semi-gloss finish and stain protection. UV stable and non-yellowing.

#### HG 500 High Gloss Sealer


Seals and protects with a high gloss finish while resists common chemicals, blushing and hazing. Excellent weatherability and non-yellowing.



- Spray or roll after bleed water dissipates and concrete is thumbprint hard
- Pigmented to show coverage
- No plastic needed



- Expose within 24 hours
- Rinse same day or pressure wash next day

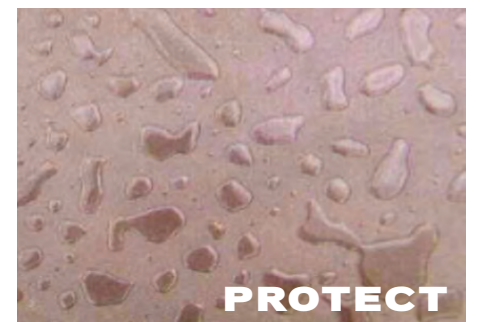

- Various levels of stain protection
- Harden, dustproof and seal
- Extend life of exposed aggregate



- Uniform finish every time
- Increases productivity with better results

## DRIVEWAY, PATIO, PORCH, SIDEWALK

### ACCESSORIES

#### D42 Tie Bags

Tie bags are 16 gauge, annealed loop-ended wire ties used for tying rebar and other non-construction applications, such as bags and carpet rolls.

#### G27 Round Stake

Manufactured from high-quality steel with a sharp point to minimize rock deflection.

#### A100 Speed Step® Bracket

A reusable forming bracket designed to simplify layout, set-up and stripping of concrete stair forming.

#### CR200 Wedge Anchor

A zinc-coated post-installed anchor for use wherever fixtures need safely secured into concrete.

#### CR400 Plastic Foundation Chairs

Offered in 2 or 3 bar configurations, rebar sizes up to #5 simply snap into place with these plastic chairs.

#### CR400 Rod Chairs

The Rod Chair accommodates any size rebar while providing a sturdy, metal base for 2 or 3 bar configurations.

#### CR600 Metal Lath Sheet

These galvanized sheets help stucco adhere to walls and ceilings. Compatible with both steel and wood framing.

#### CR700 Aluminum Form Tie

Used to hold aluminum forms in place to achieve the desired wall thickness. They break off easily and hold suspended rebar in place. Available in both full and nominal sizes.

## CHEMICALS

### Sealers

#### Aggregloss™ J25

A clear sealer that will not yellow under exposure to sunlight. J25 is a formulation of 25% methacrylate copolymers in an aromatic solvent that forms a tenacious bond to the concrete surface and provides a long lasting high gloss film.

#### Tuf Seal J35

A scientifically formulated clear, nonyellowing sealer comprised of methyl methacrylate polymers. Dries to a durable, high gloss finish that not only protects, but also beautifies floors. Designed to provide protection from oil and gasoline and excellent resistance to oils, greases and weathering.

#### Ultra Seal EF

An Earth Friendly, non-yellowing, low-odor concrete sealer with exceptional chemical resistance.

### General Use Repair

#### Casica Blacktop Repair

A acrylic latex caulk designed for filling cracks in blacktop surfaces from 1/8" to 3/8" thickness.

#### Casica Concrete Repair

A concrete crack filler and sealer for repairs to vertical and horizontal concrete, masonry, stone and stucco. Interior and exterior use.

#### Recrete™ 20 Minute

General purpose cement based concrete repair and patching material. Provides a fast setting repair mortar with excellent workability. Used for repair and patching of vertical, overhead and horizontal areas.

### Cure & Seal

#### Cure & Seal 25% J22UV

An acrylic copolymer cure, seal and dustproofing compound in an aromatic solvent containing 25% solids with special UV stabilizers. It is designed to form an excellent surface coating with a high gloss finish and provide outstanding cure performance. It is ultraviolet stable and resists yellowing while also meeting ASTM C309 and C1315.

### Joint Fillers/Sealants

#### Casica Alpha 1

One-component, non-sag polyether hybrid sealant designed for maximum adhesion between a variety of surfaces. A paintable, weather resistant seal with 25% joint movement capability for the ultimate long-term, durable seal or bond.

#### ProFill™ SL

This superior-grade, one-component MS hybrid self-leveling sealant creates waterproof joints in horizontal concrete substrates. Ideal for filling cracks or gaps on driveways, sidewalks, patios, steps, and garage floors..

#### ProFill™ AW

Two-component polyurea joint filler designed for heavy duty traffic. Solvent free, flexible, and self-leveling, used to fill tooled interior/ exterior control joints or new construction saw joints.

### Water Repellents

#### Weather Worker™ 40% J29

A proprietary 40% silane that penetrates into concrete or masonry and provides long term weatherproofing protection. It is a single component product that is ready to use and typically requires only one application. As

a result of the strong chemical bond, silane waterproof protection will last many times longer than conventional coatings. It will not darken the surface or leave a visible surface film. It is ideal for aesthetic/architectural surfaces.

### Surface Retarder

#### Top Etch

A water-based, top-surface retarder for producing exposed aggregate concrete flatwork available in two strengths: Regular and Deep.



TOP-CAST Finish Table	Package Colors
MICRO ETCH	White
	Violet
	Light Blue
	Yellow
MEDIUM ETCH	Beige
	Canary Green
	Blue
	Gray
FULL-DEPTH ETCH	Pink
	Green
	Salmon
	Orange