


<b>Date:</b>		<b>Order:</b>		<b>Quote:</b>		<b>Page:</b>		<b>of</b>	
--------------	--	---------------	--	---------------	--	--------------	--	-----------	--

Customer Name:		Project Name:	
Address:		Project Address:	
Contact Name:		Project Contact:	
Phone:		Project Phone:	
Fax:		Required By Date:	

Item	Quantity	Bar Size	Description	Finish	A	B	C	R
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								

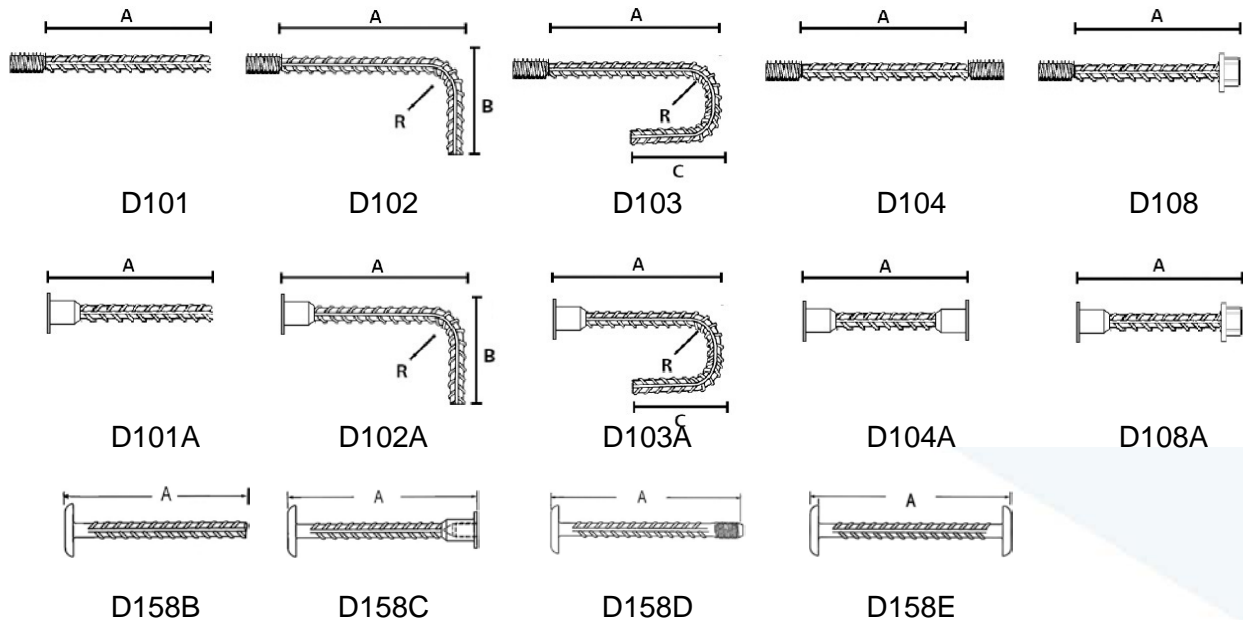

DBDI™ Splice Bars are recognized under ICC ESR-2649 for Type 2 mechanical splice requirements for ASTM A615/A706 Gr 60 reinforcing steel. When installed in accordance with DSC's recommended installation has been evaluated to exceed the requirements of ACI 318 and IBC 2012. DSC products shall be installed and used only as indicated in DSC literature available at [www.daytonsuperior.com](http://www.daytonsuperior.com). Improper installation, misuse, misapplication, or other failure to completely follow DSC's literature may cause the product to malfunction, injury, or death.