
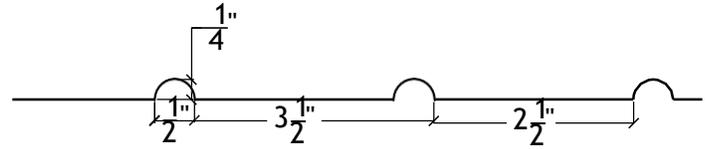


SMOOTH BRICK (3" x 8", ROUND MORTAR)

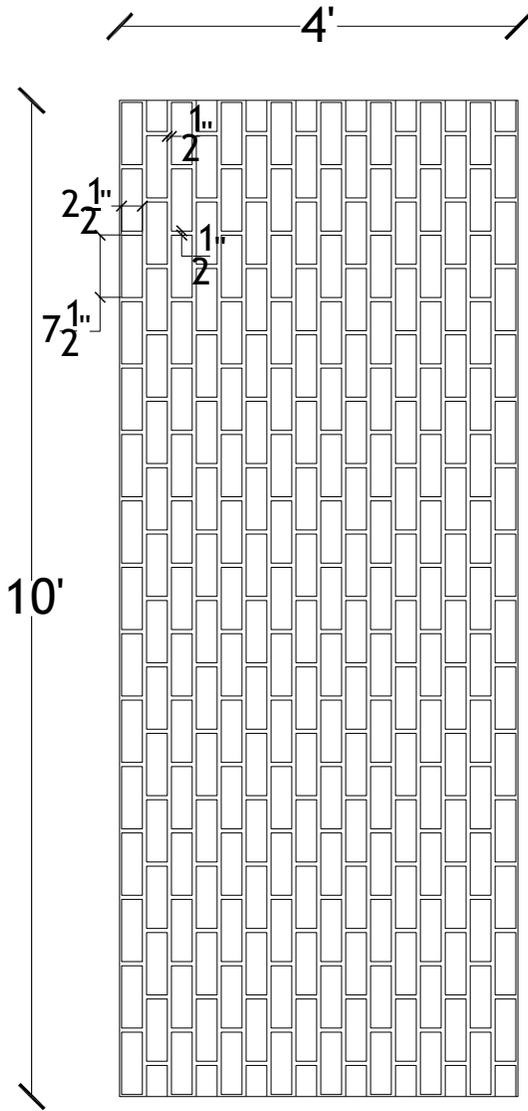

General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.

Styrene	ABS
Product Code #	Product Code #
F70598	F70515
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.070	.070
Standard Dimensions	Standard Dimensions
10' x 4'	10' x 4'
Color	Color
White	Gray



SMOOTH BRICK (3" x 8", SQUARE MORTAR)

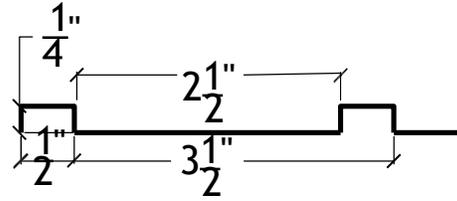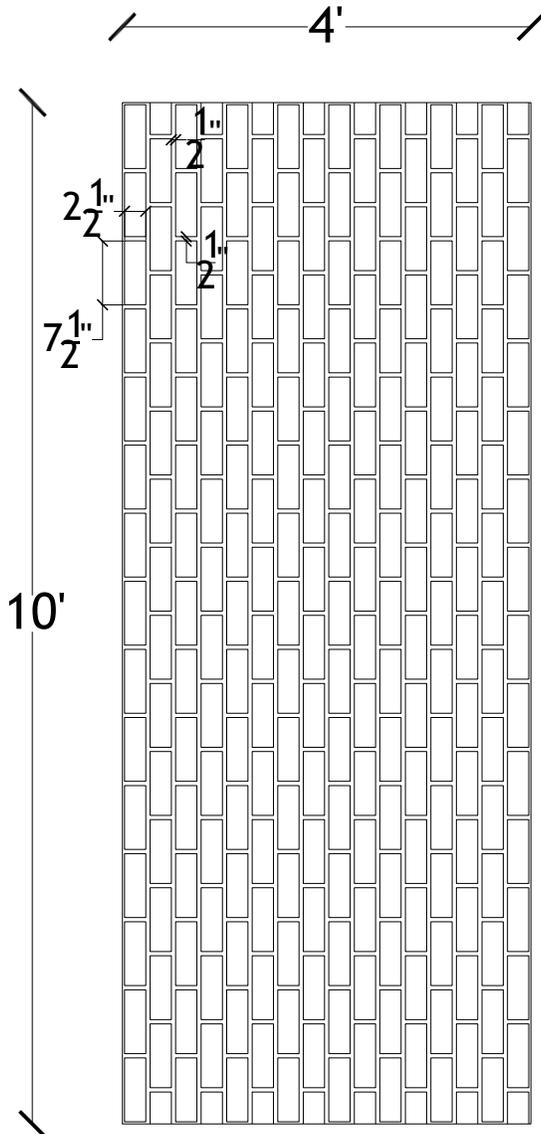

General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.

Styrene	ABS
Product Code #	Product Code #
F70327	F70267
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.070	.070
Standard Dimensions	Standard Dimensions
10' x 4'	10' x 4'
Color	Color
White	Gray



4" x 12" SMOOTH BRICK (OFF CENTER MORTAR)

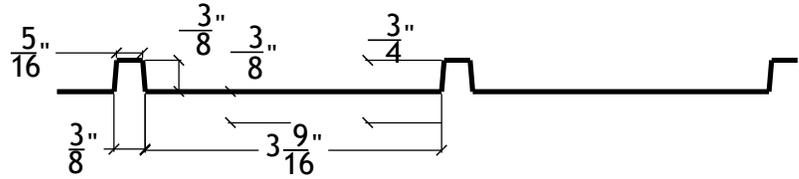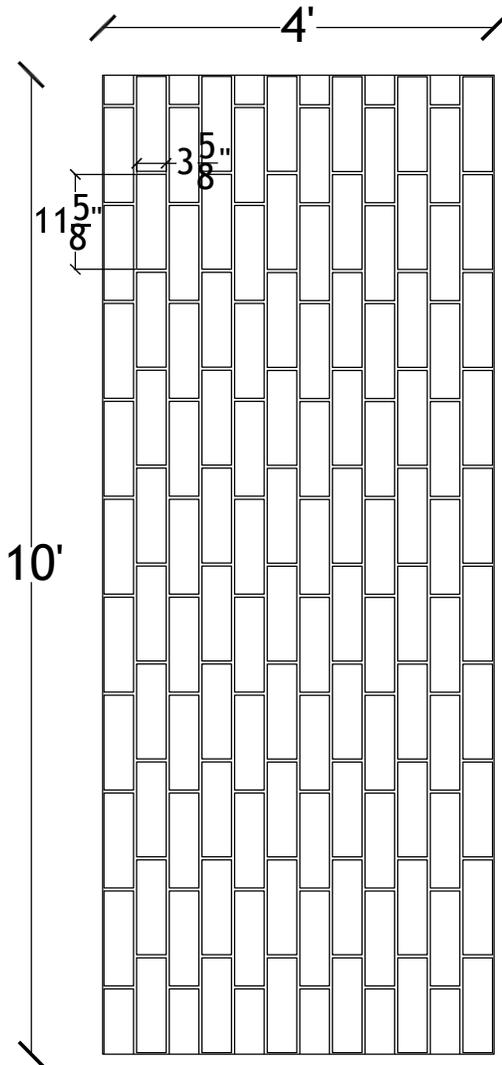

General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.

Styrene	ABS
Product Code #	Product Code #
F70329	F70269
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.090	.110
Standard Dimensions	Standard Dimensions
10' x 4'	10' x 4'
Color	Color
White	Gray



4" x 12" SMOOTH BRICK (ON CENTER MORTAR)

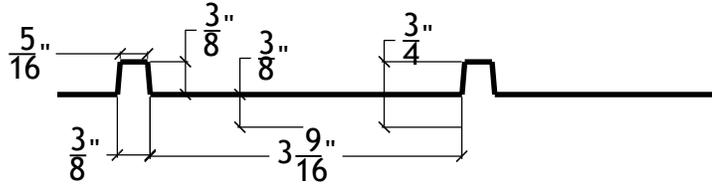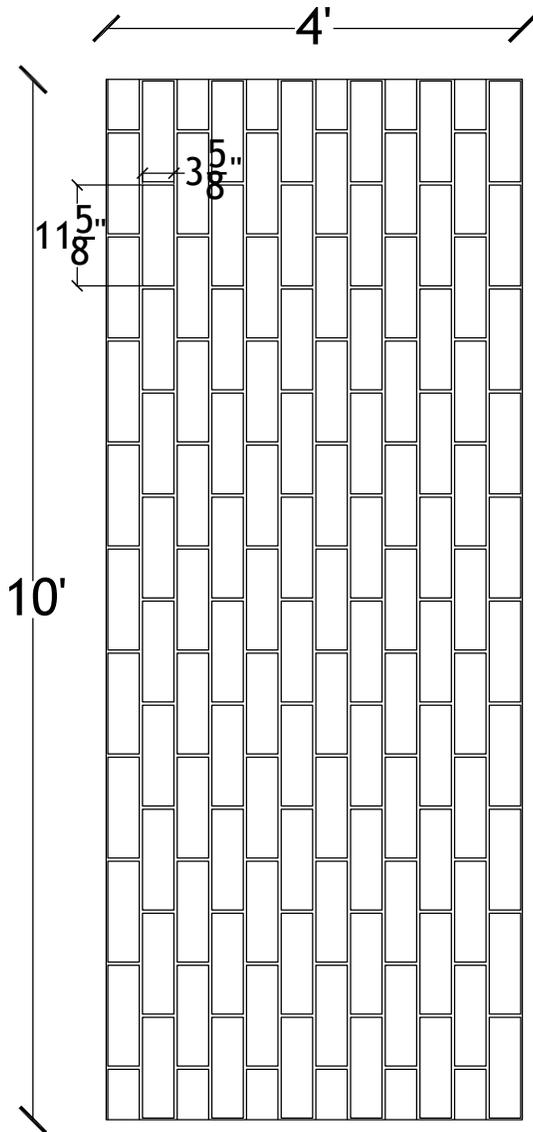

General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.

Styrene	ABS
Product Code #	Product Code #
F70328	F70268
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.090	.110
Standard Dimensions	Standard Dimensions
10' x 4'	10' x 4'
Color	Color
White	Gray



AGGREGATE BRICK

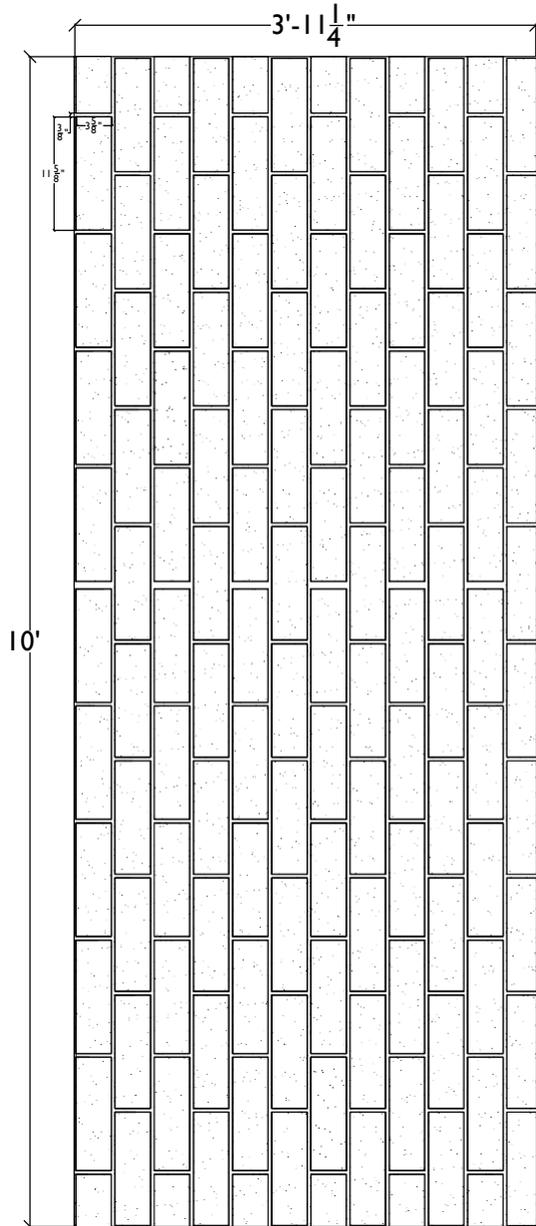


General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.

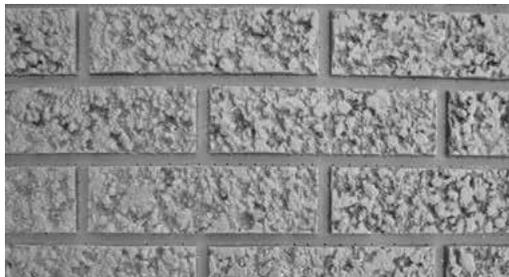

Styrene	ABS
Product Code #	Product Code #
F947039	F940008
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.090	.110
Standard Dimensions	Standard Dimensions
10' x 3'-11 1/4"	10' x 3'-11 1/4"
Color	Color
White	Gray

AUSTIN TEXTURE BRICK

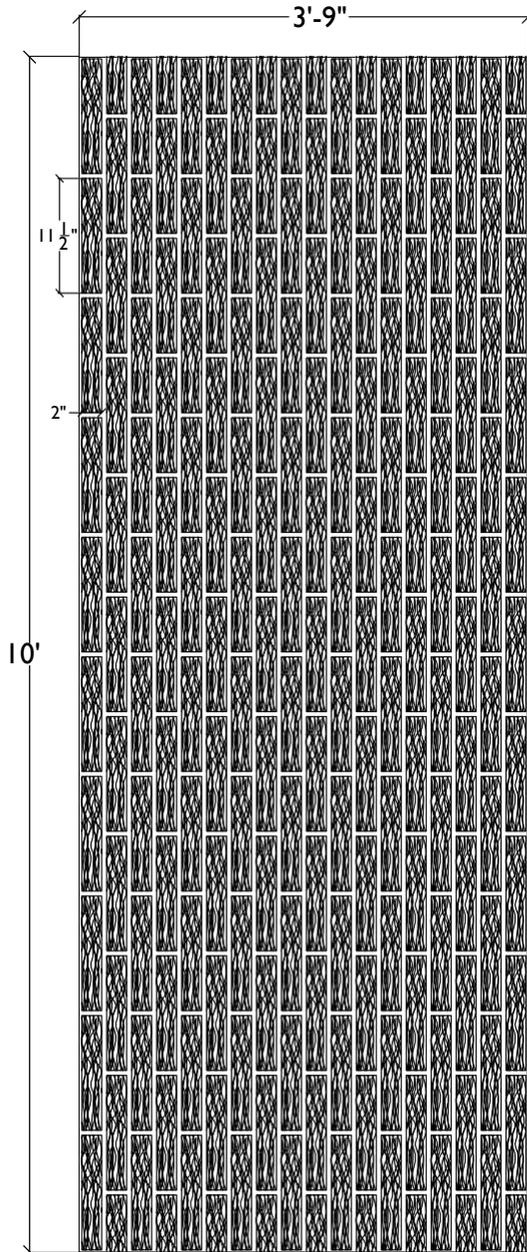

General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.

Styrene	ABS
Product Code #	Product Code #
F947038	F940007
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.090	.110
Standard Dimensions	Standard Dimensions
10' x 3'-9"	10' x 3'-9"
Color	Color
White	Gray



RUSTIC BRICK

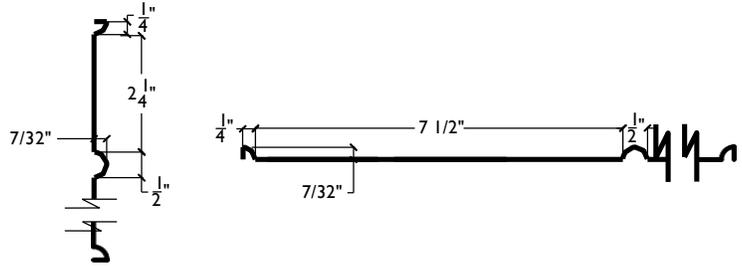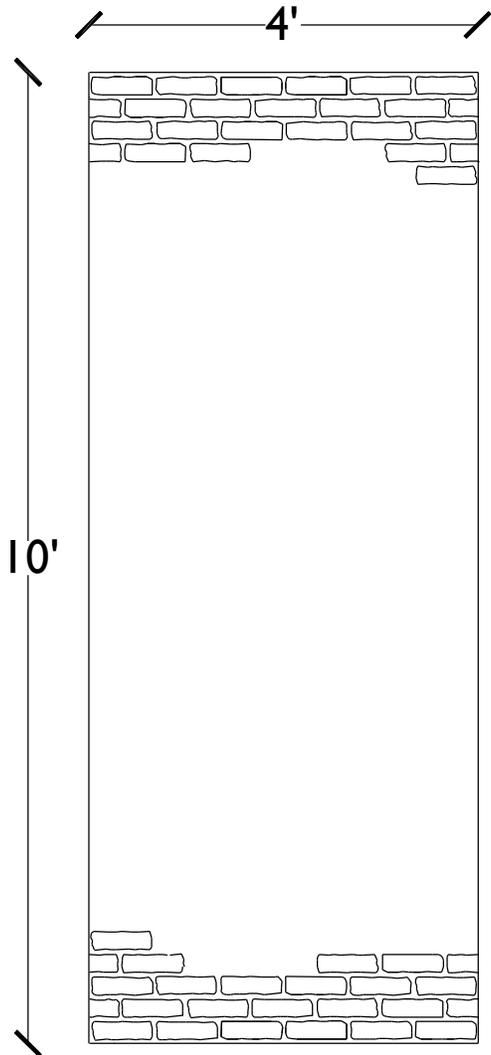

General Information:

The Styrene and ABS form liners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:



To protect from thermal deformation, form liners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, form liners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.



Styrene	ABS
Product Code #	Product Code #
F30723	F30247
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.070	.070
Standard Dimensions	Standard Dimensions
4' x 10'	4' x 10'
Color	Color
White	Gray

WEATHERED BRICK

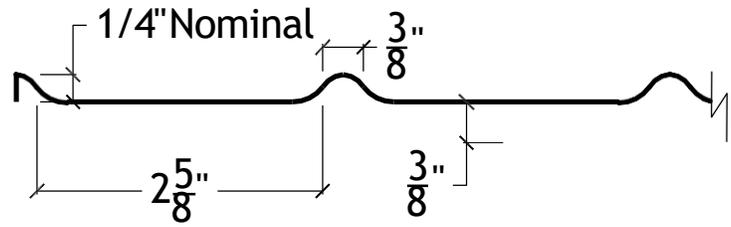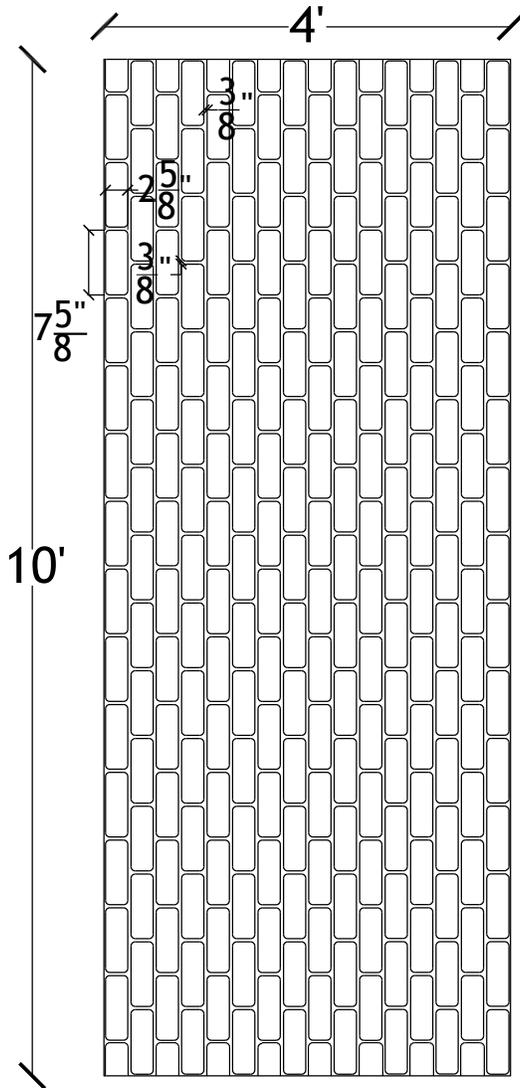

General Information:

The Styrene and ABS formliners are an economical solution for providing architectural pattern reproductions. The Styrene plastic formliner is a perfect alternative for single use applications which costs less than other liners. The ABS plastic formliner exhibits good impact resistance and excellent overall performance. Its reuse factor is 10, subject to pattern configuration, proper handling and jobsite configurations.

Care and Handling:

To protect from thermal deformation, formliners should not be exposed to temperatures above 140°F (60°C). To avoid discoloration from sunlight exposure, formliners should be covered with a tarpaulin when not in use. This helps prolong the life of the material and keeps the material clean.

Form Liners are subject to thermal expansion and contraction +/- 1/8" @ 70°F. Keep away from steam, acids, and certain fuels.



Styrene	ABS
Product Code #	Product Code #
F70348	F70349
Uses	Uses
1	Up to 10
Material Thickness	Material Thickness
.070	.070
Standard Dimensions	Standard Dimensions
10' x 4'	10' x 4'
Color	Color
White	Gray