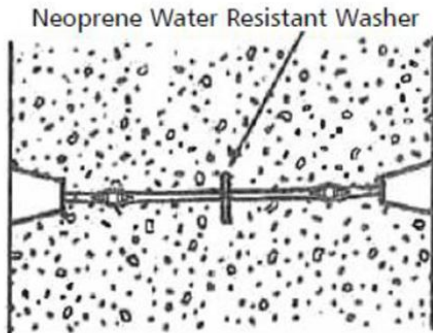



**TECHNICAL DATA SHEET****DESCRIPTION**

A3 Heavy Snap Tie is manufactured with either hot or cold-forged integral heads and is equipped with flats or crimps to prevent turning in the concrete during breakback operations. Coating the tie with wax will aid in breakback operation.

**APPLICATION**

Used for handset wood wall forming.

**FEATURES**

- 3,350 lbs. SWL that adds a safety factor or approximately 2 to 1
- Available in any length from 6" to 480"
- Available with plastic cone or metal spreader
- Can be manufactured with a tight-fitting neoprene washer (5/8" O.D. x 0.187" I.D. x 1/8" thick) located near the center of tie to eliminate water seepage along the tie

**INSTALLATION**

1. Drill holes in plywood 1/8" larger than the snap tie head (usually 5/8" diameter drill bit will be required)
2. Place the ends of snap ties through the holes in the plywood
3. Place the bracket (Jahn® "A", Jahn® "C" or Omni wedge) on the tie
4. The proper tie head position is at the midpoint or higher of the Omni wedge slot. Correct spacing between double wales is 5/8" to 3/4"
5. Jahn® "A" bracket is utilized to hold a single wale and can be installed before or after the wales have been positioned

**RELATED PRODUCTS**

- A2 Plastic Cone
- A16 Omni Wedge
- A81 Jahn® "A" Bracket
- A82 Jahn® "C" Bracket

**HOW TO ORDER**

This product is made-to-order. Please call for availability, lead time and pricing.

**MANUFACTURER**

Dayton Superior Corporation  
1125 Byers Road  
Miamisburg, OH 45342  
Customer Service: 888-977-9600  
Technical Services: 877-266-7732  
Website: [www.daytonsuperior.com](http://www.daytonsuperior.com)

**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.