


## TECHNICAL DATA SHEET

### DESCRIPTION

A93C Sure Guard Rail Post System is fabricated from hot-dipped galvanized steel for durability.

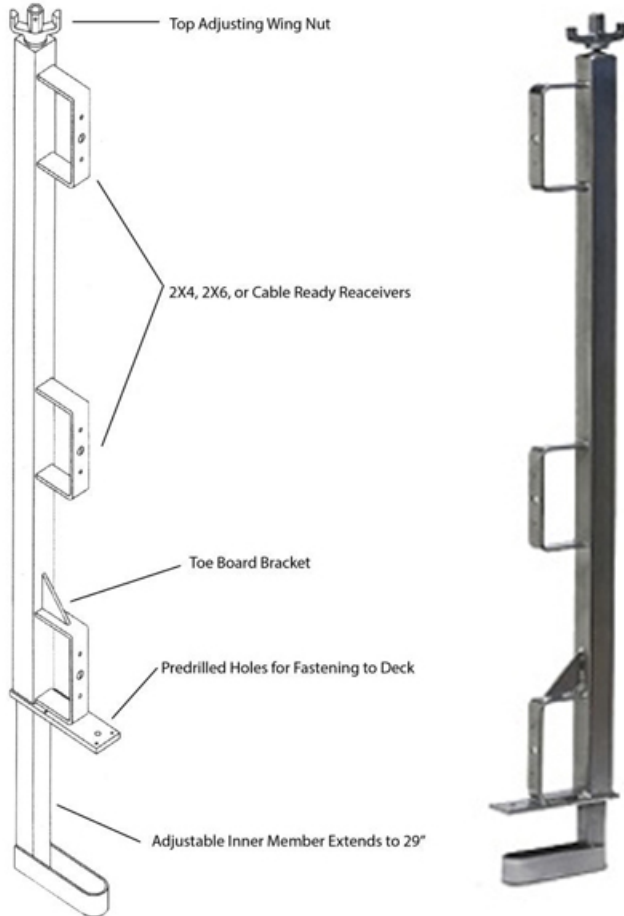

### ORDERING INFORMATION

Product Code	Description	Weight
127168	MEETS OSHA REQUIREMENTS	28.300 LB

### MANUFACTURER

Dayton Superior Corporation  
1125 Byers Road  
Miamisburg, OH 45342  
Customer Service: 888-977-9600  
Technical Services: 877-266-7732  
Website: [www.daytonsuperior.com](http://www.daytonsuperior.com)

### WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.

### FEATURES

- The Sure Guard Rail Post System meets OSHA safety requirements.
- This post can adjust to any floor slab thickness between 4" and 29".
- A drop pin makes the Sure Guard Rail Post System simple and efficient to use.
- The 30 lb. Sure Guard Rail Post System is designed to withstand the toughest jobsite conditions.
- Rail Post must be secured to deck with proper fasteners to ensure safety.

### INSTALLATION

1. The Sure Guard Rail Post System opens wide and tightens quickly, allowing for application to practically any project.
2. The post is easily installed utilizing a top adjusting wing nut which creates the ability to tighten from a standing position.
3. A specially designed base adds to the simplicity of setup with predrilled holes proving trouble-free fastening to decks.