

TECHNICAL DATA SHEET

DESCRIPTION


Dayton's Superior Beam Bolster used to support lower beam reinforcing steel.

APPLICATION

Beam Bolster is used support lower beam reinforcing steel from the soffit form.

PRODUCT SPECIFICATION


- 2" Metal Beam Bolster (BB) can support a 180 lbs point load / 270 lbs per linear foot

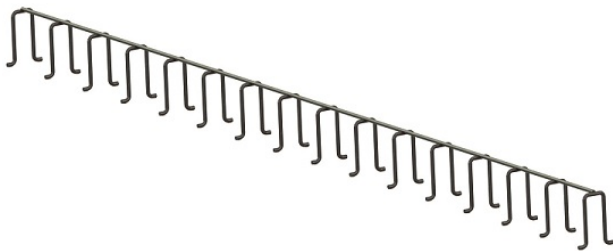

FEATURES

- Available in cover heights from 1" through 5" in 1/4" increments
- Legs spacing on 2 1/2" centers, allows field cut to fit soffit width
- Standard 5' lengths, other lengths available as special order
- Available in plain, epoxy, galvanized and stainless steel
- Foot configurations: plain, tipped, dipped, stainless steel

TECHNICAL DATA

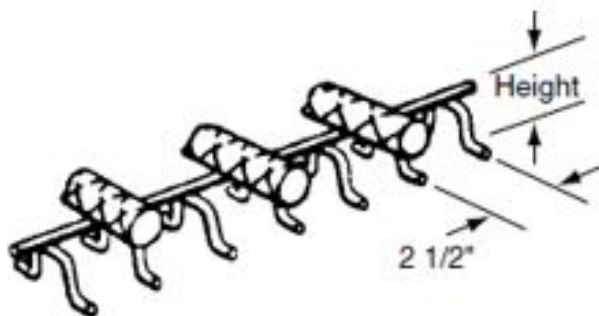

Leg Spacing: 2 1/2" on center

RELATED PRODUCTS

- BBU Beam Bolster Upper
- SB Slab Bolster
- SBU Slab Bolster Upper

HOW TO ORDER

- Specify: (1) linear feet required, (2) Beam Bolster, (3) Finish (plain, epoxy, galvanized, stainless steel) (4) Feet: Plain, dipped, tipped, stainless steel.

Additional sizes and finishes available as a made to order product. Please call for availability, lead time and pricing.

ORDERING INFORMATION

BEAM BOLSTER - PLASTIC DIPPED

Product Code	Description	Weight
71103	1" X 5'	0.190 LB / FT
71203	1-1/2" X 5'	0.220 LB / FT
71303	2" X 5'	0.280 LB / FT
72363	2-1/2" X 5'	0.300 LB / FT
72383	3" X 5'	0.320 LB / FT

BEAM BOLSTER - PLAIN

Product Code	Description	Weight
71300	2" X 5'	0.280 LB / FT

BEAM BOLSTER - PLASTIC TIPPED

Product Code	Description	Weight
71206	1-1/2" X 5'	0.220 LB / FT
71306	2" X 5'	0.260 LB / FT

BEAM BOLSTER - EPOXY COATED

Product Code	Description	Weight
71107	1" X 5'	0.190 LB / FT
71207	1-1/2" X 5'	0.220 LB / FT
71307	2" X 5'	0.280 LB / FT
72387	3" X 5'	0.500 LB / FT

MANUFACTURER

Dayton Superior Corporation
1125 Byers Road
Miamisburg, OH 45342
Customer Service: 888-977-9600
Technical Services: 877-266-7732
Website: www.daytonsuperior.com

APPROVALS / COMPLIANCE

- ACI-50-66
- ACI315 and ACI315R

TECHNICAL DATA SHEET**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.