

TECHNICAL DATA SHEET

DESCRIPTION


Beam Bolster Upper positions reinforcing bars or steel wire to proper cover height.

APPLICATION

To support successive layers of steel, above the other by being placed on and perpendicular to lower steel.

PRODUCT SPECIFICATION

- Standard 5' lengths
- Custom length when specified
- Cover height 1" to 5", 1/4" increments
- Available in epoxy, plain and galvanized finishes

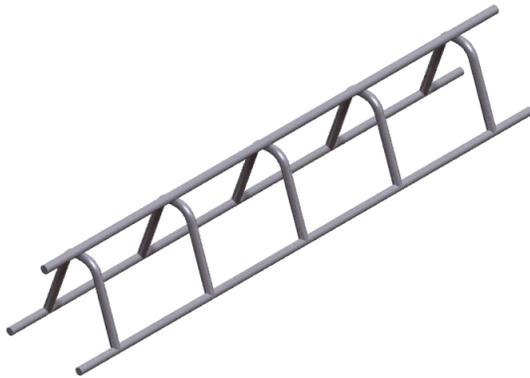

FEATURES

- Lower runner wires provide bearing on lower mat steel or carton form surface
- Support legs on 2-1/2" centers allow for cutting to length in the field and reinforcing steel to be spaced closely together

BENEFITS

- Easy to cut in field when needed.

HOW TO SPECIFY

Beam Bolster Upper bar support shall be as manufactured by Dayton Superior Corporation.

APPROVALS / COMPLIANCE

- ACI ACI-SP66-04, ACI-315 and ACI-315R

HOW TO ORDER

Additional sizes and finishes available as a made to order product. Please call for availability, lead time and pricing.

ORDERING INFORMATION

BEAM BOLSTER UPPER - PLAIN

Product Code	Description	Weight
72100	1" X 5'	0.360 LB / FT
72110	1-1/4" X 5'	0.360 LB / FT
72120	1-1/2" X 5'	0.390 LB / FT
72130	1-3/4" X 5'	0.420 LB / FT
72140	2" X 5'	0.430 LB / FT
72550	2-1/4" X 5'	0.640 LB / FT
72560	2-1/2" X 5'	0.660 LB / FT
72580	3" X 5'	0.720 LB / FT
72610	3-1/2" X 5'	0.780 LB / FT

BEAM BOLSTER UPPER - EPOXY COATED

Product Code	Description	Weight
72107	1" X 5'	0.370 LB / FT
72117	1-1/4" X 5'	0.390 LB / FT
72127	1-1/2" X 5'	0.410 LB / FT
72137	1-3/4" X 5'	0.420 LB / FT
72147	2" X 5'	0.440 LB / FT
72557	2-1/4" X 5'	0.650 LB / FT

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

TECHNICAL DATA SHEET**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.