

TECHNICAL DATA SHEET

DESCRIPTION

The CS Continuous Support is a continuous metal bar support used to maintain the elevation of rebar in reinforced concrete. They are melted, rolled, and manufactured in the USA. Continuous supports are available for wire mesh support in 2" through 16" heights. Available in plain finish.


APPLICATION

The CS Continuous Support is used to support one layer of steel above another and space them to required distance. It may be used to support steel on soft material form surface, such as carton forms or fill material.

PRODUCT SPECIFICATION

- Cover height 2" to 16" in 1/2" increments
- Usable product span is 7'
- Product heights from 2" to 7" have 2 runner wires
- Product heights of 7-1/2" to 16" have 3 runner wires

NOTE: Measure length is 7' and billing length is 8'

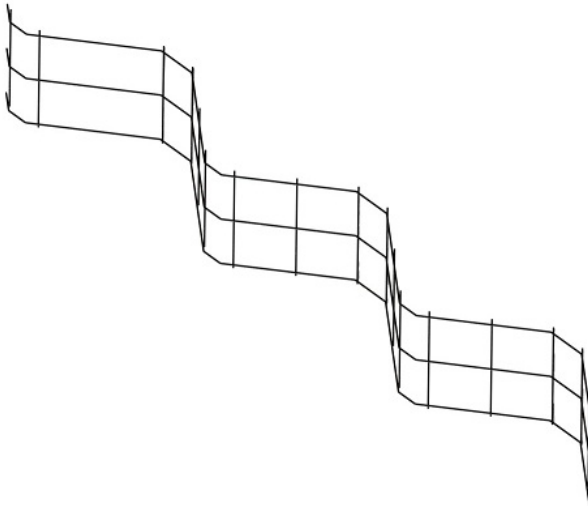

ORDERING INFORMATION

CONTINUOUS SUPPORT (CLASS 3) - PLAIN

Product Code	Description	Weight per Foot
84220	2" X 8'	0.163 LB
84222	2-1/2" X 8'	0.169 LB
84224	3" X 8'	0.175 LB
84226	3-1/2" X 8'	0.181 LB
84228	4" X 8'	0.187 LB
84230	4-1/2" X 8'	0.192 LB
84232	5" X 8'	0.198 LB
84234	5-1/2" X 8'	0.204 LB
84236	6" X 8'	0.210 LB
84238	6-1/2" X 8'	0.216 LB
84240	7" X 8'	0.216 LB
84242	7-1/2" X 8'	0.418 LB
84244	8" X 8'	0.426 LB
84246	8-1/2" X 8'	0.426 LB
84248	9" X 8'	0.442 LB
144981	9-1/4" X 8'	0.447 LB
84250	9-1/2" X 8'	0.451 LB
84252	10" X 8'	0.459 LB
84253	10-1/4" X 8'	0.463 LB
84254	10-1/2" X 8'	0.467 LB
84255	10-3/4" X 8'	0.471 LB
84256	11" X 8'	0.475 LB
100407	11-1/4" X 8'	0.479 LB
84258	11-1/2" X 8'	0.483 LB
84259	11-3/4" X 8'	0.488 LB
84260	12" X 8'	0.492 LB
84262	12-1/2" X 8'	0.500 LB
100227	12-3/4" X 8'	0.504 LB
84264	13" X 8'	0.508 LB
100251	13-1/4" X 8'	0.512 LB
84266	13-1/2" X 8'	0.516 LB
84268	14" X 8'	0.524 LB
84270	14-1/2" X 8'	0.533 LB
100247	14-3/4" X 8'	0.537 LB
84272	15" X 8'	0.541 LB
84274	15-1/2" X 8'	0.549 LB
84286	16" X 8'	0.557 LB

MANUFACTURER

Dayton Superior Corporation
1125 Byers Road
Miamisburg, OH 45342
Customer Service: 888-977-9600
Technical Services: 877-266-7732
Website: www.daytonsuperior.com

TECHNICAL DATA SHEET**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.