


## TECHNICAL DATA SHEET

### DESCRIPTION

Dayton Superior D/R Thread Bar She-Bolts (D30A) are heavy duty, reusable form ties for medium and heavy concrete construction.

### APPLICATION

The D30A features the D/R Thread Bar's 2-1/2 threads per inch for rapid installation and stripping. Two She-Bolts are used with a length of B12A D/R Thread Bar to tie formwork for any wall thickness.

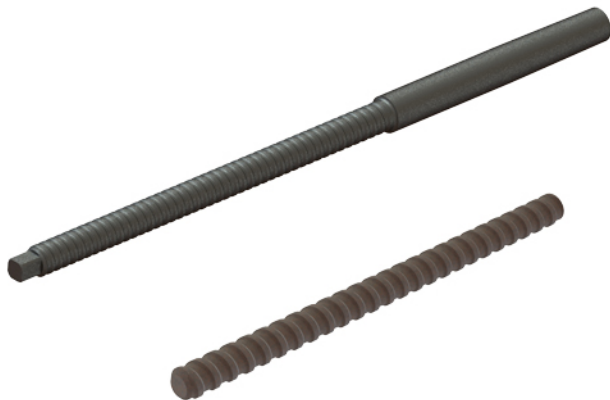

### FEATURES


- She-Bolts are manufactured with a square end, for wrench turning purposes.
- The D30A one piece swivel wing nut accessory can handle up to 10% battered walls without use of special washers.

### TECHNICAL DATA

SWL: SAFE WORKING LOAD AT 2 TO 1 FACTOR OF SAFETY

PCN	SWL (lbs)	Inside Tie Rod	External Threads	Length	A	B	C	D	F
127029	22,400	15mm D/R	15mm D/R	16"	3/4"	19/32"	9-1/2"	1"	2"
123075	22,400	15mm D/R	15mm D/R	18"	3/4"	19/32"	9-1/2"	1"	2"
123077	22,400	15mm D/R	15mm D/R	24"	3/4"	19/32"	15-1/2"	1"	2"
123504	39,200	20mm D/R	20mm D/R	18"	3/4"	25/32"	9-1/2"	1-1/4"	3"
123506	39,200	20mm D/R	20mm D/R	24"	3/4"	25/32"	15-1/2"	1-1/4"	3"
145402	56,000	26mm D/R	32mm D/R	30"	1"	25/32"	18-1/2"	1-1/2"	27/8"

### INSTALLATION



### RELATED PRODUCTS

- B12A Swivel Wing Nut
- B12A Inside Rod

### ORDERING INFORMATION

OTHER SIZES ARE AVAILABLE, PLEASE CALL FOR PRICING.

Product Code	Description	Weight
127029	5/8" - 15 MM X 16	2.95 LB
123075	5/8" - 15 MM X 18	2.05 LB
123077	5/8" - 15 MM X 24	2.64 LB
123504	7/8" - 20 MM X 18	3.29 LB
123506	7/8" - 20 MM X 24	3.96 LB
145402	1-1/4" - 32 MM X 30	10.5 LB

### MANUFACTURER

Dayton Superior Corporation  
 1125 Byers Road  
 Miamisburg, OH 45342  
 Customer Service: 888-977-9600  
 Technical Services: 877-266-7732  
 Website: www.daytonsuperior.com

### WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.