


TECHNICAL DATA SHEET

DESCRIPTION

K18 FS Stakes are fabricated in #5 gauge wires for 1/2" - 1-1/2" bar diameters.

APPLICATION

K18 FS Stakes are available to hold dowel bars or tie bars in 6"-12" thick slabs.

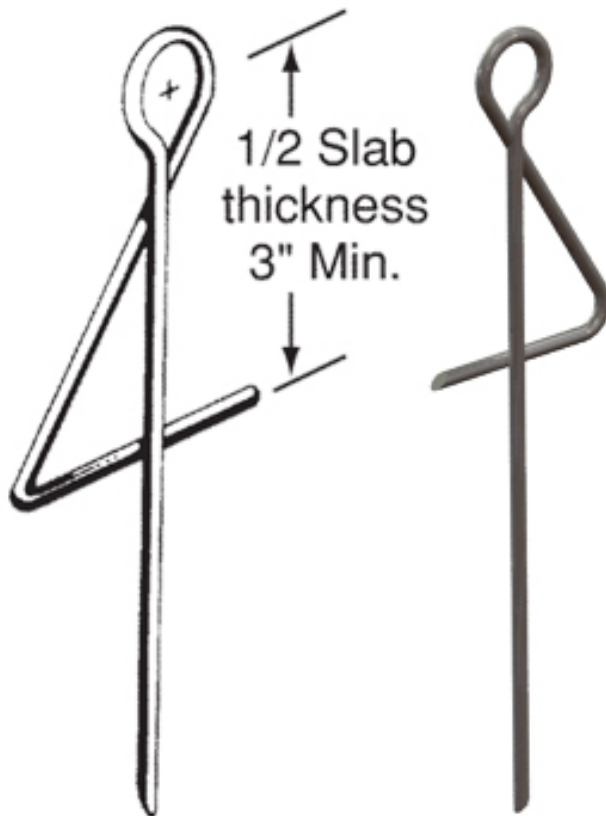

ORDERING INFORMATION

Product Code	Description	Weight
80357	1/2" BAR SIZE - 3" - 1/2 SLAB THICKNESS	0.165 LB
80377	5/8" BAR SIZE - 3" - 1/2 SLAB THICKNESS	0.165 LB
80383	3/4" BAR SIZE - 3" - 1/2 SLAB THICKNESS	0.165 LB
80358	1/2" BAR SIZE - 3-1/2" - 1/2 SLAB THICKNESS	0.173 LB
80378	5/8" BAR SIZE - 3-1/2" - 1/2 SLAB THICKNESS	0.173 LB
80384	3/4" BAR SIZE - 3-1/2" - 1/2 SLAB THICKNESS	0.173 LB
80359	1/2" BAR SIZE - 4" - 1/2 SLAB THICKNESS	0.184 LB
80379	5/8" BAR SIZE - 4" - 1/2 SLAB THICKNESS	0.184 LB
80385	3/4" BAR SIZE - 4" - 1/2 SLAB THICKNESS	0.184 LB
80360	1/2" BAR SIZE - 4-1/2" - 1/2 SLAB THICKNESS	0.206 LB
80380	5/8" BAR SIZE - 4-1/2" - 1/2 SLAB THICKNESS	0.206 LB
80386	3/4" BAR SIZE - 4-1/2" - 1/2 SLAB THICKNESS	0.206 LB
80361	1/2" BAR SIZE - 5" - 1/2 SLAB THICKNESS	0.225 LB
80381	5/8" BAR SIZE - 5" - 1/2 SLAB THICKNESS	0.225 LB
80387	3/4" BAR SIZE - 5" - 1/2 SLAB THICKNESS	0.225 LB
80362	1/2" BAR SIZE - 5-1/2" - 1/2 SLAB THICKNESS	0.228 LB
80382	5/8" BAR SIZE - 5-1/2" - 1/2 SLAB THICKNESS	0.23 LB
80388	3/4" BAR SIZE - 5-1/2" - 1/2 SLAB THICKNESS	0.23 LB
80389	5/8" BAR SIZE - 6" - 1/2 SLAB THICKNESS	0.286 LB
80363	1" BAR SIZE - 6" - 1/2 SLAB THICKNESS	0.042 LB
80364	1-1/4" BAR SIZE - 3"-5" - 1/2 SLAB THICKNESS	0.042 LB
80365	1-1/2" BAR SIZE - 3"-5" - 1/2 SLAB THICKNESS	0.042 LB

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

RELATED PRODUCTS

- K15 MS Stake
- K17 PS Stake
- K19 Channel Stake
- K21 Mat Stake
- K23 Fabric Stake
- K24 Mud Jack Tube

WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.