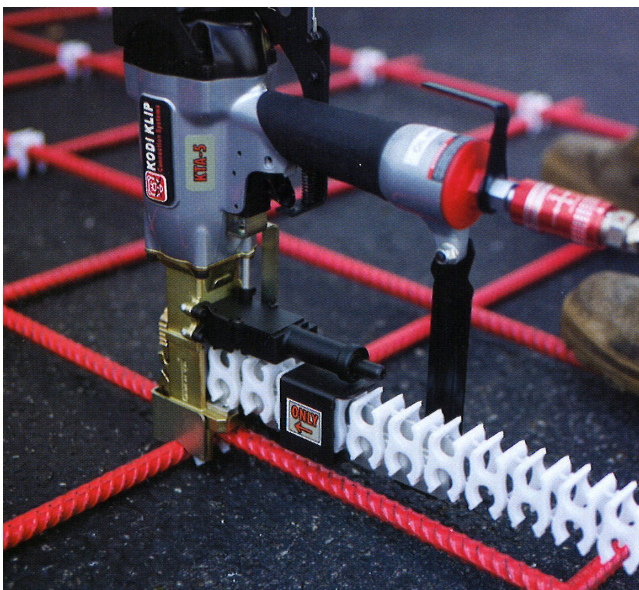


TECHNICAL DATA SHEET**DESCRIPTION**

The KODI KLIP[®] System saves time, money and provides stronger rebar connections using the patented four-point grip system that gives more consistent and stable connections. Dramatically reduces wracking and eliminates unwanted motion.

APPLICATION

Use wherever rebar connections are required, specifically on site-pour, precast, tilt-up, concrete applications, pre-stress and pools.

**FEATURES**

- Available in imperial & metric sizes for #3 [6mm] to #6 [20mm] rebar
- K-KLIPS are made of high-strength and temperature resistant polycarbonate material
- Works with black, epoxy, stainless, galvanized & composite rebar

BENEFITS

- SAVES TIME - Move from job-to-job quicker and faster
- SAVES MONEY - Easy to learn so you spend less time training rod workers
- SAFER - Safest & fastest in the industry
- STRONGER - Connections rigidly grip saddle joints, dramatically reducing wracking & eliminating unwanted motion
- EASILY IDENTIFIABLE - KLIPS are brightly color-coded by size, making them easy to distinguish & inspect.
- NON-CORROSIVE - KLIPS can't rust, won't degrade and won't scratch or damage epoxy coated rebar or fiberglass reinforcing rods.
- FOUR-POINT GRIP - Provide uniform holding strength at every connection point
- EFFORTLESS APPLICATION - Snap into position in milliseconds to rigidly grip the rebar.

APPROVALS / COMPLIANCE

- The KODI KLIP KLIPPER Gun & KLIPS have various DOT certifications. Please see the Product Page for the latest certifications on <https://www.daytonsuperior.com>.

RELATED PRODUCTS

- KODI KLIP[®] KLIPPER[™] Gun
- KODI KLIP[®] KLIPPER[™] Gun Extension Handle
- KODI KLIP[®] KORNER KLIP[™]

HOW TO ORDER

- Choose the size K-KLIP you need.
Within product numbering system, the first Number = TOP rebar size and second number = BOTTOM rebar size. All K-KLIPS are sold by the carton only.
Example: Part # KCS324 - Violet color
Imperial - #3 to #4 Rebar
#3 is the top rebar size and
#4 is the bottom rebar size

TECHNICAL DATA SHEET

ORDERING INFORMATION

KODI KLIP[®] - K-KLIP[®] IMPERIAL

Product Code	Description	Weight
KCS323	#3 TO #3 BLUE IMPERIAL K-KLIP	28.90 LB
KCS324	#3 TO #4 VIOLET IMPERIAL K-KLIP	21.30 LB
KCS325	#3 TO #5 PURPLE IMPERIAL K-KLIP	22.10 LB
KCS326	#3 TO #6 BEIGE IMPERIAL K-KLIP	21.30 LB
KCS424	#4 TO #4 RED IMPERIAL K-KLIP	20.70 LB
KCS425	#4 TO #5 ORANGE IMPERIAL K-KLIP	22.10 LB
KCS426	#4 TO #6 LIME GREEN IMPERIAL K-KLIP	21.40 LB
KCS525	#5 TO #5 WHITE IMPERIAL K-KLIP	20.90 LB
KCS526	#5 TO #6 LIGHT BLUE IMPERIAL K-KLIP	20.90 LB
KCS626	#6 TO #6 YELLOW IMPERIAL K-KLIP	21.50 LB

KODI KLIP[®] - K-KLIP[®] IMPERIAL PRESTRESS

CONNECTOR

Product Code	Description	Weight
KPS412	1/2 DIA STRAND GRAY IMPERIAL K-KLIP - PRESTRESS	22.60 LB

KODI KLIP[®] - K-KLIP[®] METRIC

Product Code	Description	Weight
KKM0610	6MM TO 10MM PURPLE METRIC K-KLIP	29.80 LB
KKM0612	6MM TO 12MM LIME GREEN METRIC K-KLIP	22.90 LB
KKM0810	8MM TO 10MM GREEN METRIC K-KLIP	29.20 LB
KKM0812	8MM TO 12MM ORANGE METRIC K-KLIP	22.60 LB
KKM0816	8MM TO 16MM GRAY METRIC K-KLIP	21.00 LB
KKM1010	10MM TO 10MM BLUE METRIC K-KLIP	28.90 LB
KKM1012	10MM TO 12MM BROWN METRIC K-KLIP	22.10 LB
KKM1016	10MM TO 16MM TAN METRIC K-KLIP	22.00 LB
KKM1020	10MM TO 20MM BEIGE METRIC K-KLIP	21.30 LB
KKM1212	12MM TO 12MM RED METRIC K-KLIP	21.80 LB
KKM1216	12MM TO 16MM VIOLET METRIC K-KLIP	21.70 LB
KKM1220	12MM TO 20MM LIME GREEN METRIC K-KLIP	21.40 LB
KKM1612	16MM TO 12MM YELLOW METRIC K-KLIP	21.00 LB
KKM1616	16MM TO 16MM WHITE METRIC K-KLIP	20.90 LB
KKM1620	16MM TO 20MM LIGHT BLUE METRIC K-KLIP	22.10 LB
KKM2020	20MM TO 20MM YELLOW METRIC K-KLIP	21.50 LB

VERSATILE APPLICATIONS

Cross Connections



Chair/Form Spacer

Cover Heights

- KCS323: 0.60"
- KCS424: 0.70"
- KCS525: 0.85"
- KCS626: 1.00"



Parallel Connections

Shoot clip onto bottom bar then leverage the top bar into place after KLIP is installed



For more information on Utilizing the KODI KLIP system, refer to the user manual.

TECHNICAL DATA SHEET**MANUFACTURER**

Dayton Superior Corporation
1125 Byers Road
Miamisburg, OH 45342
Customer Service: 888-977-9600
Technical Services: 877-266-7732
Website: www.daytonsuperior.com

WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.