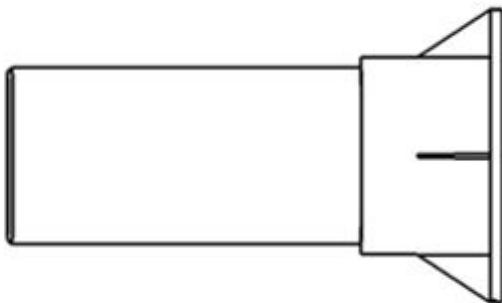
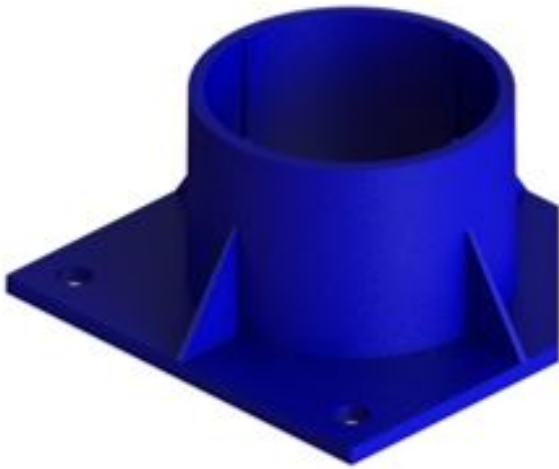


**TECHNICAL DATA SHEET****DESCRIPTION**

The D340 Plastic Flange fastens onto domestic sized D310 couplers including plain, stainless-steel, ChromX, and hot dipped galvanized finishes. Using a plastic flange Formsaver provides corrosion protection as compared to using a plain steel flange. Additionally, the plastic flange eliminates the hassle of specifying a stainless or ChromX plate for the flange.

**PRODUCT SPECIFICATION**

- Extension of Taper-Lock product line
- Accommodates rebar sizes #4 through #11
- Available for use with domestic sized couplers: plain, stainless-steel, ChromX, galvanized.
- Fastened to formwork by nails
- Available only as a made-to-order product. Please call for availability, lead times and pricing

**FEATURES**

- Tapered inner diameter to allow for tight fit with D310 couplers
- Crushing ribs to allow fit for full tolerance range of D310 outer diameter
- Holes on flange allow to fasten to form with nails, same as standard D340 couplers

**BENEFITS**

- Provides corrosion resistance, in lieu of stainless plate steel
- Provides a safer working environment by eliminating protruding rebar ends through formwork
- Eliminates the need to cut or drill formwork
- Eliminates rebar congestion

**TECHNICAL DATA**

Plastic Flange is pressed onto domestic D310 couplers to make a special made-to-order D340 plastic flanged assembly and is available only for order by special request.

When chromX and stainless plate steel isn't readily available, plastic flange allows for added corrosion resistance.

**INSTALLATION**

1. Ensure that threads are clean, in good condition, and conform to gauge requirements as published in the Taper-Lock Machine Operations Manual before assembly.
2. Press plastic flange onto D310 coupler concentrically until coupler is flush with plastic flange +/- .031

**HOW TO ORDER**

- Specify: (1) quantity, (2) name, (3) rebar size, (4) finish

Example:

500 pcs., D340 Taper-Lock® Plastic Flange Coupler, #6, Black

The Plastic Flange Coupler is a made to order product. Please call for availability, lead time and pricing.

**MANUFACTURER**

Dayton Superior Corporation  
1125 Byers Road  
Miamisburg, OH 45342  
Customer Service: 888-977-9600  
Technical Services: 877-266-7732  
Website: [www.daytonsuperior.com](http://www.daytonsuperior.com)

**TECHNICAL DATA SHEET****WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.