SB - SLAB BOLSTER

Bar Supports


TECHNICAL DATA SHEET

DESCRIPTION

Dayton Superior Slab Bolster is a continuous reinforcing bar support.

APPLICATION

Slab Bolster is used to support the lower slab reinforcing bar on a continuous 5ft long top wire.

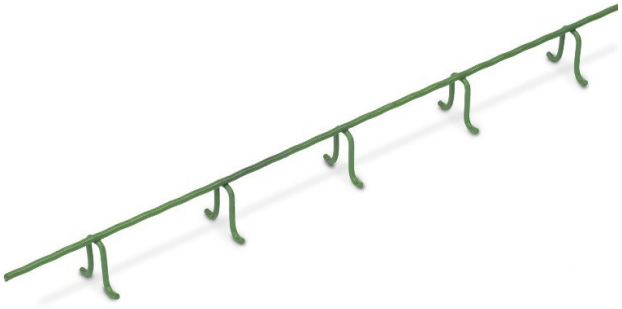

FEATURES

- Height ¾” to 3”
- Top wire corrugations are spaced on 1” centers and serve as guides for reinforcing bar spacing
- Available in plain, epoxy or galvanize coatings and stainless steel
- 5' lengths standard, other lengths available as special order
- Made in USA

BENEFITS

- Continuous design reduces labor time placing rebar

APPROVALS / COMPLIANCE

- ACI 315-99
- ACI 31812-14
- CRSI RB4.1-2022 Compliant
- CRSI Load Category 200 lbs.
- May be used for corrosion resistance classes 1, 1A and 3.

INSTALLATION

1. Per ACI 315-99

RELATED PRODUCTS

- SBU Slab Bolster Upper
- BB Beam Bolster
- BBU Beam Bolster Upper

HOW TO ORDER

- Specify: (1)quantity, (2) name, (3) height, (4) special coatings
  Example: 500, SB Slab Bolster, 4" height, plastic tipped

  Additional sizes available. Please contact Dayton Superior.

ORDERING INFORMATION

SLAB BOLSTER - PLAIN (Class 3)

Product Code	Description	Weight
70100	3/4" X 5'	0.18 LB
70200	1" X 5'	0.18 LB
70300	1-1/4" X 5'	0.19 LB
70400	1-1/2" X 5'	0.19 LB
70410	1-3/4" X 5'	0.20 LB
70420	2" X 5'	0.22 LB
70430	2-1/4" X 5'	0.24 LB
70440	2-1/2" X 5'	0.25 LB
70450	2-3/4" X 5'	0.26 LB
70460	3" X 5'	0.26 LB

SLAB BOLSTER - PLASTIC TIPPED (Class 1)

Product Code	Description	Weight
70106	3/4" X 5'	0.18 LB
70206	1" X 5'	0.18 LB
70306	1-1/4" X 5'	0.19 LB
70406	1-1/2" X 5'	0.19 LB
70416	1-3/4" X 5'	0.20 LB
70426	2" X 5'	0.21 LB
70436	2-1/4" X 5'	0.21 LB
70446	2-1/2" X 5'	0.24 LB
70456	2-3/4" X 5'	0.24 LB
70466	3" X 5'	0.25 LB

SLAB BOLSTER - GALVANIZED & TIPPED (Class 1)

Product Code	Description	Weight
70209	1" X 5'	0.18 LB
70309	1-1/4" X 5'	0.18 LB
70409	1-1/2" X 5'	0.18 LB
70419	1-3/4" X 5'	0.21 LB
70429	2" X 5'	0.21 LB
70439	2-1/4" X 5'	0.21 LB
70449	2-1/2" X 5'	0.24 LB
70459	2-3/4" X 5'	0.24 LB
70469	3" X 5'	0.25 LB

File Date: 10/16/2026

TECHNICAL DATA SHEET

SLAB BOLSTER - PLASTIC DIPPED (Class 1)

Product Code	Description	Weight
70103	3/4" X 5'	0.19 LB
70203	1" X 5'	0.19 LB
70303	1-1/4" X 5'	0.20 LB
70403	1-1/2" X 5'	0.20 LB
70413	1-3/4" X 5'	0.21 LB
70423	2" X 5'	0.23 LB
70433	2-1/4" X 5'	0.25 LB
70443	2-1/2" X 5'	0.26 LB
70453	2-3/4" X 5'	0.27 LB
70463	3" X 5'	0.28 LB

SLAB BOLSTER - EPOXY COATED (Class 1A)

Product Code	Description	Weight
70107	3/4" X 5'	0.18 LB
70207	1" X 5'	0.18 LB
70307	1-1/4" X 5'	0.20 LB
70407	1-1/2" X 5'	0.21 LB
70417	1-3/4" X 5'	0.22 LB
70427	2" X 5'	0.22 LB
70437	2-1/4" X 5'	0.24 LB
70447	2-1/2" X 5'	0.25 LB
70457	2-3/4" X 5'	0.26 LB
70467	3" X 5'	0.27 LB

SLAB BOLSTER - EPOXY COATED & PLASTIC DIPPED Class 1A)

Product Code	Description	Weight
701073	3/4" X 5'	0.19 LB
702073	1" X 5'	0.19 LB
704073	1-1/2" X 5'	0.21 LB
704273	2" X 5'	0.23 LB
704473	2-1/2" X 5'	0.26 LB
704673	3" X 5'	0.28 LB

MANUFACTURER

Dayton Superior Corporation
1125 Byers Road
Miamisburg, OH 45342
Customer Service: 888-977-9600
Technical Services: 877-266-7732
Website: www.daytonsuperior.com

WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton (“Ancillary Services”) will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton’s option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton’s specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER’S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.