


TECHNICAL DATA SHEET

DESCRIPTION

The T13D Strongback Anchor Bolt is a drill-in expansion anchor designed to be used in emergency situations, allowing the contractor to locate a strongback on a panel after the panel has been poured.

APPLICATION

Just like applying the T13 bolt, drill a 3/4" diameter hole in the panel and install the Strongback Anchor Bolt by torque to a minimum of 200 ft. lbs. 3/4". B12 Coil Rod or 3/4" B14A Adjustable Coil Bolts with B11 Plate Washers are then screwed into the top of the Strongback Anchor Bolt and the strongbacks are attached to the panel. Once the panel is erected and the strongbacks are removed, the T13D Strongback Anchor Bolt is removed and can be reused on future panels.

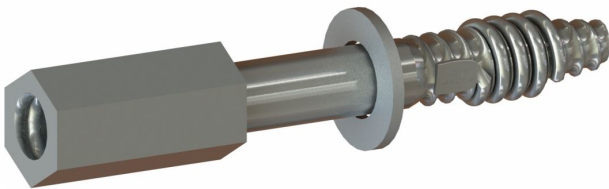

FEATURES

- Able to locate a strongback on a panel that has already been poured
- Reusable
- Available in 4-1/2" and 6" lengths
- T13D Strongback Anchor Bolt comes with one T13 Tang and round washer

TECHNICAL DATA

| T13D Length | Safe Working Load @ 2:1 Safety Factor |
|-------------|---------------------------------------|
| 4-1/2" | 4,500 lbs. |
| 6" | 6,000 lbs. |

RELATED PRODUCTS

- B12 Coil Rod
- B14A Adjustable Coil Bolts
- B11 Plate Washers

HOW TO ORDER

- To Order:
Specify: (1) quantity, (2) name, (3) length.

Example:
50, T13D Strongback Anchor Bolt, 4-1/2" long.

ORDERING INFORMATION

STRONGBACK DRILL-IN - ANCHOR BOLT

| Product Code | Description | Weight |
|--------------|---|---------|
| 127766 | T13D - 3/4" X 6" EGALV STRONGBACK DRILL-IN ANCHOR | 1.83 LB |

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.