


## TECHNICAL DATA SHEET

### DESCRIPTION

The 275P patch cap is molded from PC/ABS engineered polymer.

### APPLICATION

T275P patch cap is a durable plastic patch designed to quickly cover setting plug recesses of T275 or T110 tilt-up lifting inserts.

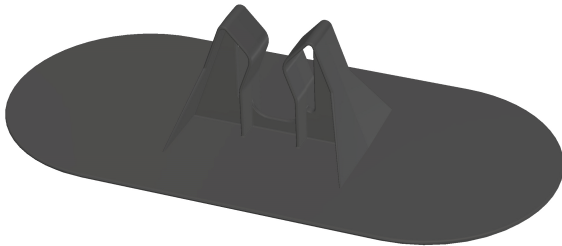

### FEATURES

- The patch is supplied in a concrete gray color with a matte finish that allows subsequent painting, if desired.
- Fast, one-piece “push-on” installation
- Weather and chemical resistant
- Oval shape: 4.3”x9”

### INSTALLATION

1. Start the patch grippers on the top edge of the anchor
2. Push the patch onto the anchor and flush with the concrete

NOTE: The T275P patch cap will not prevent corrosion or rusting of an embedded anchor that is subject to wet conditions. Spraying the anchor with a corrosion resistant compound and applying a bead of silicone around the underside of the patch will help prevent moisture penetration.

### RELATED PRODUCTS

- T110 Lifting Insert
- T275 Lifting Insert

### ORDERING INFORMATION

#### FOR T275 LIFTING INSERTS

Product Code	Description	Weight
146576	OVAL PATCH CAP FOR T275	0.14 LB

### MANUFACTURER

Dayton Superior Corporation  
 1125 Byers Road  
 Miamisburg, OH 45342  
 Customer Service: 888-977-9600  
 Technical Services: 877-266-7732  
 Website: www.daytonsuperior.com

### WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton (“Ancillary Services”) will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton’s option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton’s specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER’S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.