
A110 METAL RIB


Light Wall Forming


TECHNICAL DATA SHEET

DESCRIPTION

A110 Metal Rib is fabricated from either 28 gauge (A110) or 26 gauge (A110 Heavy) hot-dipped galvanized steel.

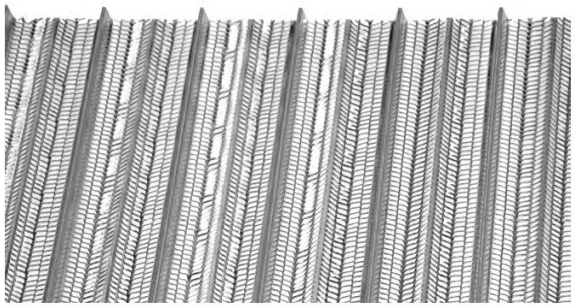

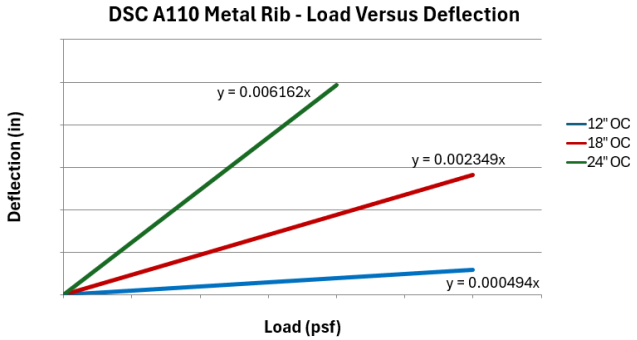

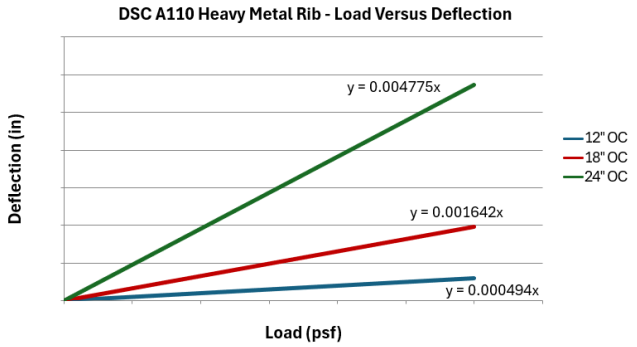

FEATURES

- Lightweight sheets are easily cut and installed in the field.
- Formwork is left in place, so no stripping of forms required - simply remove brace.
- Can be used in applications ranging from pile caps and footings, to blind side walls and tunnels.
- Meets requirements of ASTM A653 and ASTM C847.

Technical Data

Model	A110 (139922)	A110 Heavy (139700)
Surface/Sheet	18 sq. ft.	18 sq. ft.
Pallet/Ordering	250 sheets / 4500 sq. ft.	250 sheets / 4500 sq. ft.
Rib Space	3.80"	3.80"
Sheet Thickness	28 GA (0.0187 in.)	26 GA (0.0217 in.)
Recommended Pour Rate	2-4 ft./hr.	3-4 ft./hr.

RELATED PRODUCTS

- A46 Ties
- B6R Rebar Hook
- A46B1 and A3B1 Combination Ties

ORDERING INFORMATION

Product Code	Description	Weight
139922	A110 Metal Ribs - 27" x 97" Sheet	10.50 LB
139700	A110 Heavy Metal Rib - 27" X 97" Sheet	11.90 LB

MANUFACTURER

Dayton Superior Corporation
1125 Byers Road
Miamisburg, OH 45342
Customer Service: 888-977-9600
Technical Services: 877-266-7732
Website: www.daytonsuperior.com

File Date: 9/2/2026

WARRANTY (ACCESSORIES)

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.